

Tortuga

Carriage without track



CARPANO
EQUIPMENT

Tortuga 1 or 2

Is a motorized carriage sliding on a flat panel with a minimum height of 50 mm and thickness from 5 to 50 mm

Tortuga STW1 o 2

Is made for holland profile (stiffeners for shipyard)







CARPANO EQUIPMENT Srl

Via Cà dell'Orbo 18 40055 - Castenaso (fraz.Villanova) - Bologna - Italy

Phone +39 051 6053215 fax +39 051 6053218 mail@carpanoequipment.com www.carpanoequipment.com

Some work positions

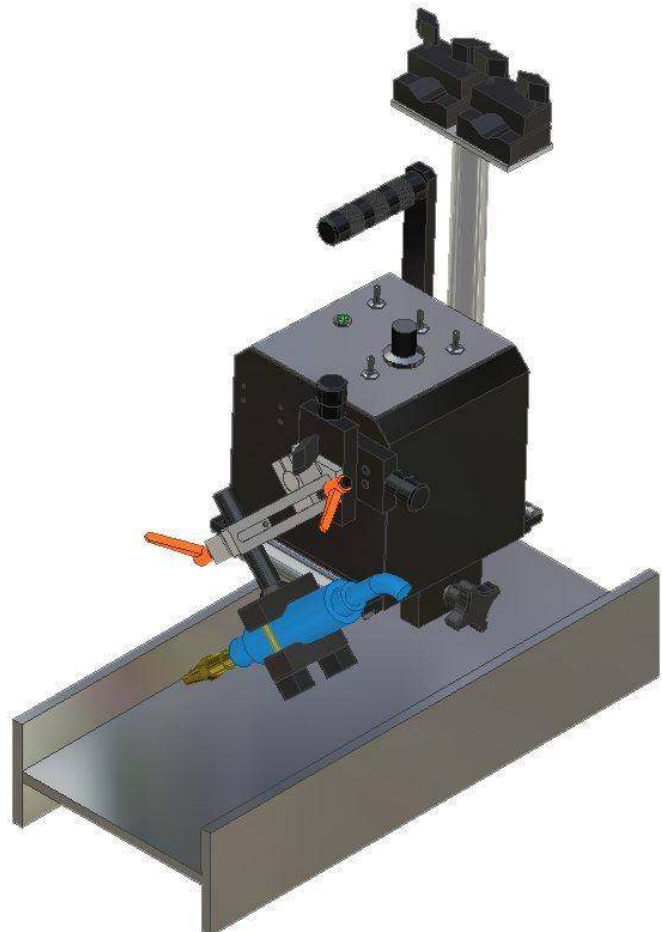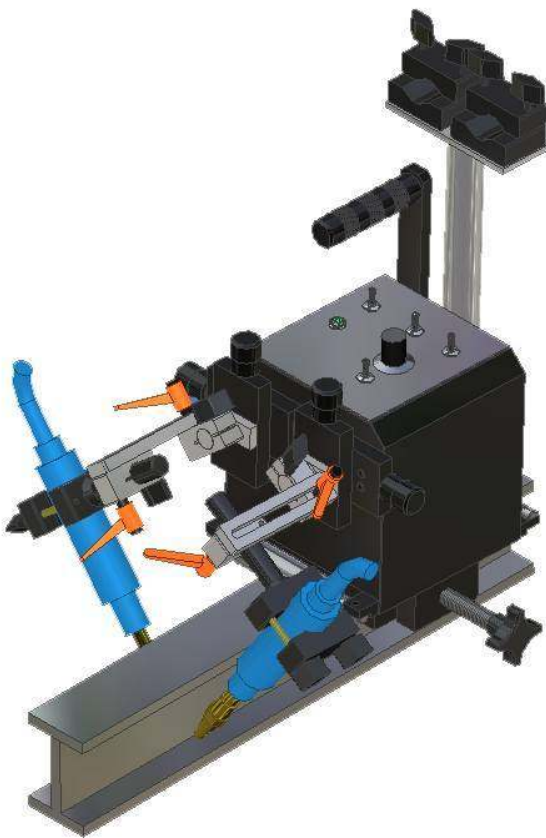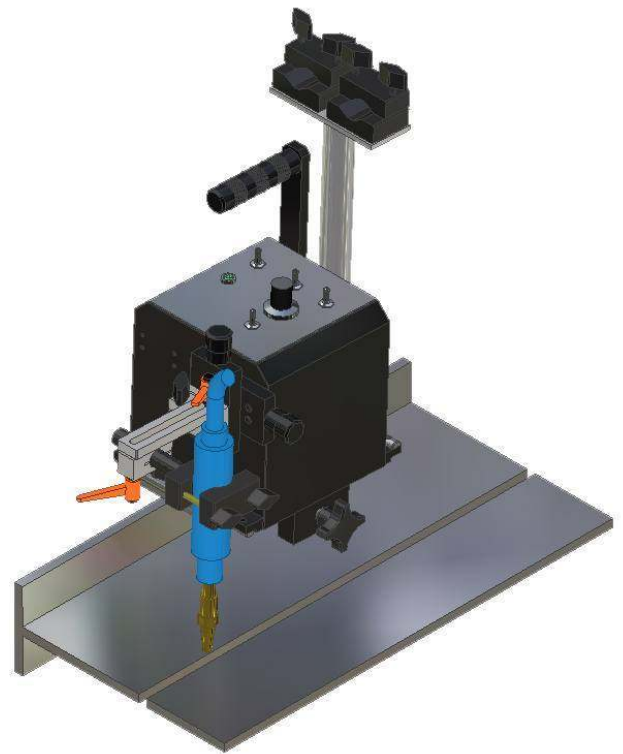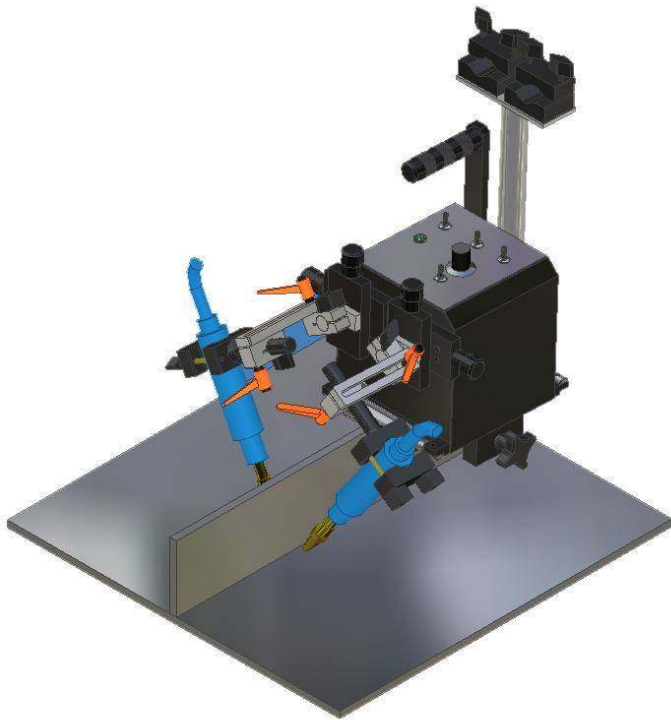




Technical data


Dimensions: width 220 mm x height 330 mm x
length 340 mm
Weight: 9,5 Kgs
Speed: from 100 to 1800 mm/min
Motor: DC with planetary gear
Power input: 230 VAC standard
42/48 VAC on demand
24/60 VDC on demand

Funzioni di comando:

- Switch ON-OFF
- Switch RUN-STOP
- Speed adjustment by 10 turn potentiometer
- Switch torch 1 and 2

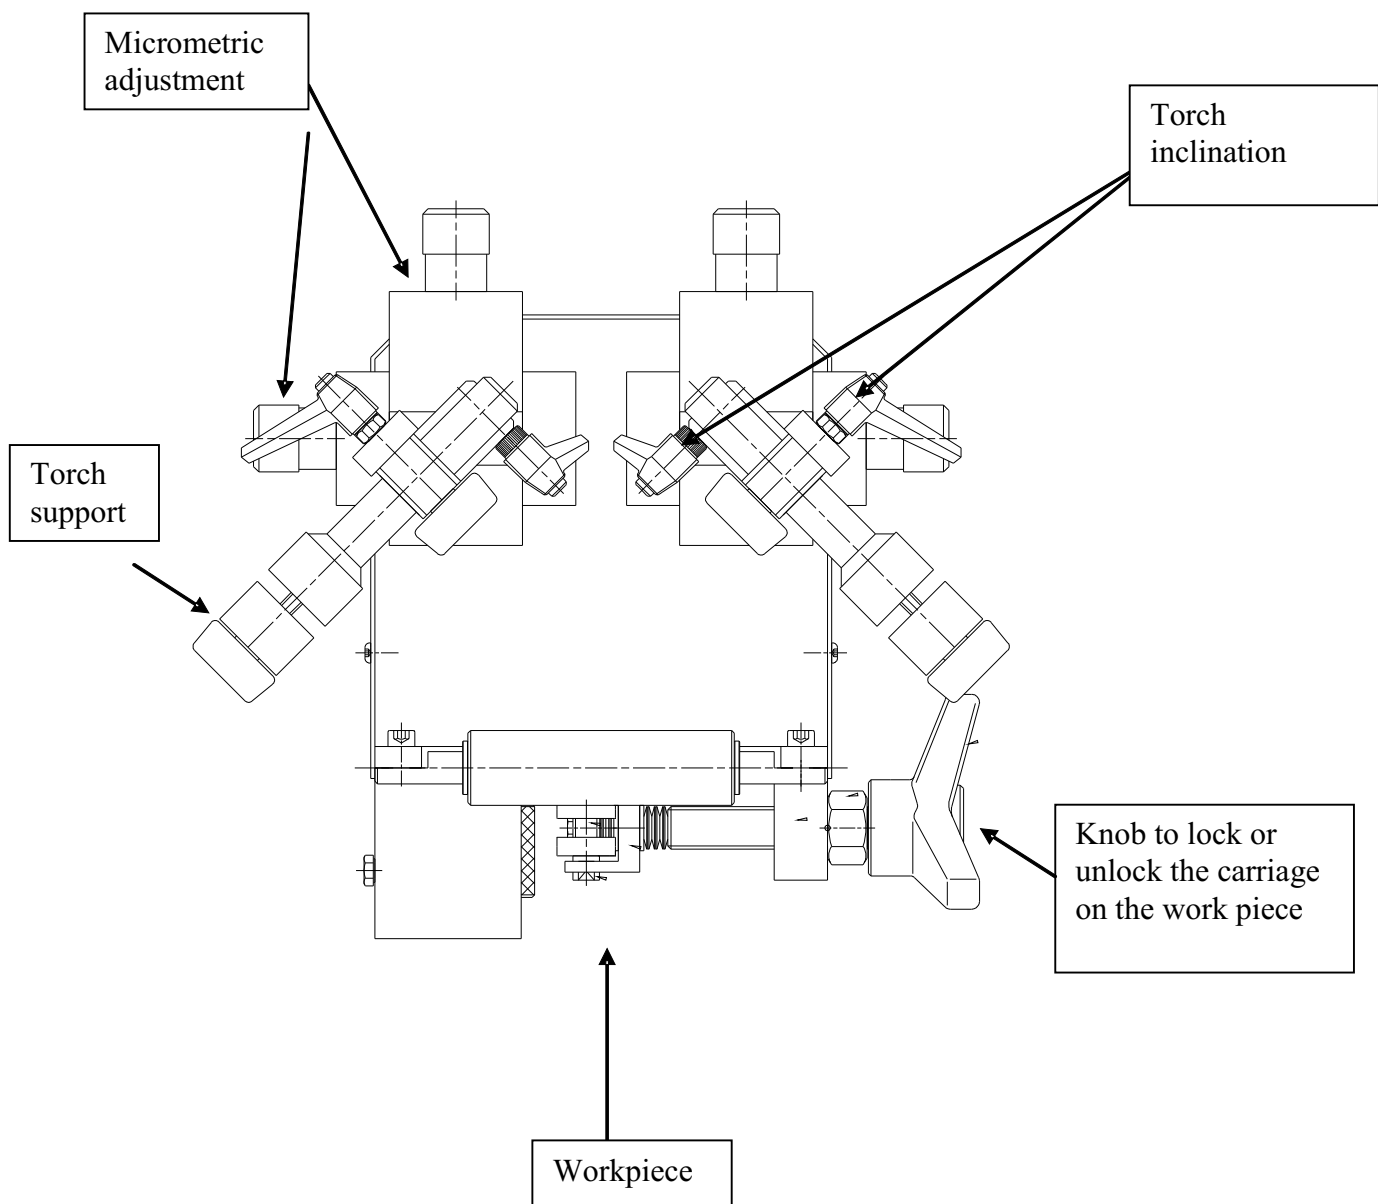

Tortuga STW 1 or 2

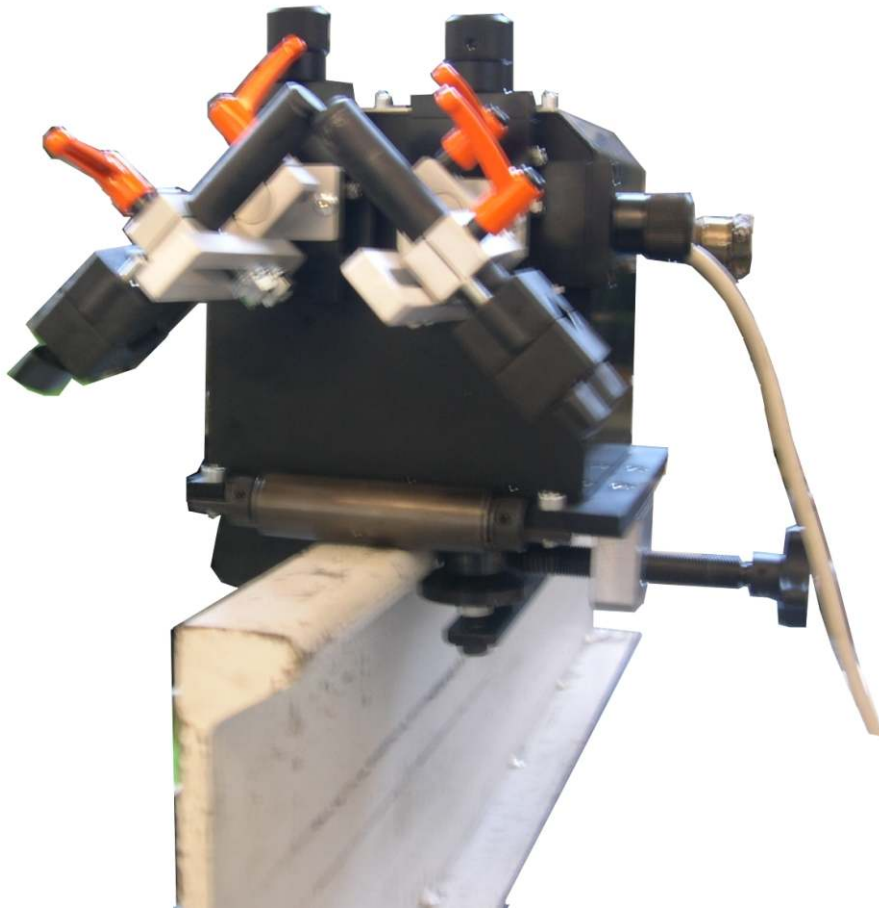

Tortuga STW

This version has 2 special wheels with the same shape of the holland profile (stiffner).

This wheel are adjustable so, this model can run on profile from 80 to 400 mm of height

The Tortuga STW is available for 1 or 2 torches

Power input 42-48 VAC on demand



A sample of application on flat panel: thickness 20 mm and height 400 mm

